

The Levab X-treme


Advanced Lane Conditioning System

The NEW Evolution in Lane Maintenance

Specifications

- **No Rollers, No Buffers, No Wicks:** the lane oil is applied directly onto the lane by means of air atomizing spray nozzles ("Direct Spray Application" system).
- Suitable for **all lane oils**, from low to ultra-high viscosity.
- **Short-run program** for applying extra oil on the first 10-20 feet (adjustable).
- Uses **very little lane cleaner** due to an adjustable spray pulse duty cycle.
- The oil tank is large enough to condition **60 lanes** or more.
- Stripper cleaning capacity of approx. **25 lanes** on one water tank filling (depending on settings).
- **3 pre-programmed oiling profiles** ("Recreation", "League" and "Tournament") are present in memory, and can be easily adjusted.
- Continuous monitoring of the oil and cleaner levels.
- Indicates when the oil level in the oil tank is running low. At indication, enough oil is left for **at least 12 more lanes**.
- Built-in jamming and overload **protection**.
- Conditioning session time: **60 sec per lane** on average (stripping and oiling combined).
- Power consumption: max. 2000 Watts during full operation; 15 Watts in stand-by mode.
- Voltage: 220V
- Dimensions: 1370 x 330 x 980 mm (W/H/D) (54 x 13 x 39 inches) including projecting parts and controls.
- Weight: 130 kg (286 Lb)


CE-approved **emergency stop button** and activity indicator.

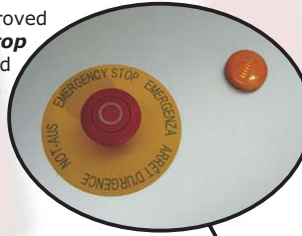


Adjustments and daily settings easily controlled through **built-in LCD display**. **Daily menu** for day-to-day operations such as selection of operation mode or oiling profile. **Special menu** for less frequent settings, statistics and tests.




Active temperature control for a constant temperature of the lane oil: this ensures a **consistent** oil pattern from lane to lane.




Accurate dynamic speed control enables simple adjustment of the **oil thickness**: from 5 to 60 units and more. The built-in controller automatically calculates the **correct speed** for every possible oil layer thickness.

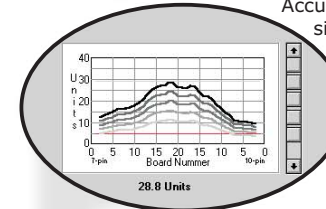

The gradient of the oil along the lane may be adjusted to maximize bowling pleasure and at the same time minimize carry-down. Conditioning distance can be set between 30 and 45 feet. Any setting can be **stored on your PC** for later retrieval.

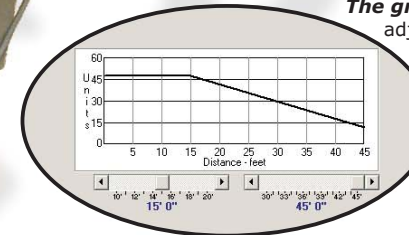

Illuminated **start/stop button** on large handlebar for easy handling. Press the button once for a normal conditioning session. Press twice ('double-click') for a **short-run** oiling session.

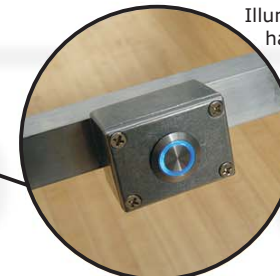

Soft equaliser brush for finishing touch to your lane oil pattern.



High-quality **air atomizing spray nozzles** apply the conditioner oil directly onto the lane and give each lane exactly the same condition, day to day, season to season.

Levab International
 Industrieterrein Oosterzij 3
 1851 NV Heiloo
 The Netherlands
 Tel.: +31-(0)72-5324245
 Fax: +31-(0)72-5324248
 Internet: www.bowling-products.com
 E-mail: Levab@Bowling-Products.com

